

PK 42002-SH

High Performance

PALFINGER CRANE



KTU
protected

**Paltronic
150**
controlled

RRC
Radio Remote Control
operated

ISC
Integrated Stability Control
monitored

AOS
Active Oscillation Suppression
inside

DPS^{plus}
Dual Power System
activated

Large Crane Technology at the Highest Level


As a model of reliability and safety, the PK 42002 SH combines all the features one expects from a true state-of-the-art large crane by PALFINGER.

This crane includes many innovative ideas that will make you more successful. Equipped with continuous slewing system and Power Link Plus, it is second to none in flexibility. Its intelligent control technology has all the bells and whistles when it comes to convenience and operator-friendliness.

Perfect Blend of Power and Intelligence

PK 42002 SH High Performance

G

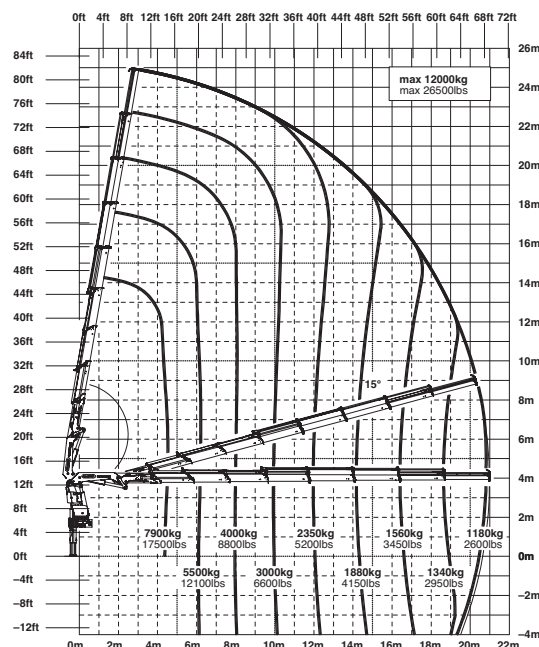

Technical Specifications (EN 12999 HC1 HD5/B3)

Max. lifting moment	41.1 mt/402.8 kNm	297070 ft.lbs
Max. lifting capacity	15000 kg/147.2 kN	33070 lbs
Max. hydraulic outreach	21.0 m	68' 11"
Max. manual outreach	25.2 m	82' 8"
Max. outreach (with fly jib)	31.2 m	102' 4"
Slewing angle	endless	
Slewing torque		
with 1 gear	3.8 mt/37.3 kNm	27490 ft.lbs
with 2 gears	5.0 mt/49.1 kNm	36170 ft.lbs

E PJ080C JV2 DPS PLUS

